Satisfy Professional's Needs






MAKE TOUGH Jobs Easy

000

Extreme Durability and Excellent Demolition Performance

Optimized hammer mechanism delivers excellent demolition performance.




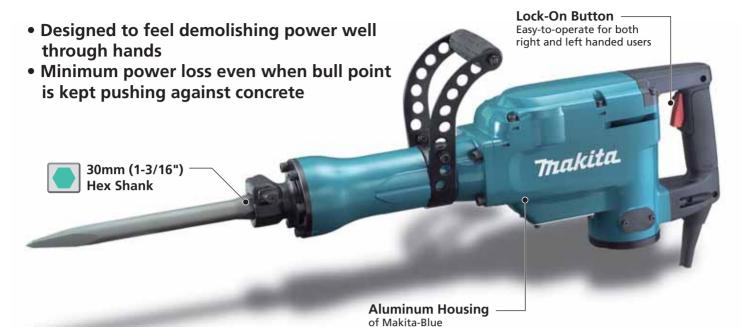

Comparison of Demolition Efficiency

Note: 1. It may differ under some conditions. 2. Numbers in the charts below are relative values when the capacities of Competitor "H" are indexed at 100.

Test conditions: Demolished concrete with compressive strength of 40 N/mm², and measured the amount of concrete removed



Adjustable Large Side Handle

Enables to operate in the most convenient position.



Rubberized Soft Grip

Provides more control and less hand fatigue.



Good Reparability

No need for replacing the barrel even if bolt hole is broken. New holes can be drilled between the original holes on the barrel.



Demolition Hammer

30mm Hex Shank

Carrying Case



HM1306 30mm Hex Shank

Continuous rating Input 1,510W Impacts per minute (ipm) Dimensions $(L \times W \times H)$ Net weight Power supply cord

1,450 652 x 121 x 231mm (25-3/4" x 4-3/4" x 9-1/8") 15kg (33.1/bs) 5.0m (16.4ft)

Standard Equipment Bull Point, Wrench, Side Handle, Oil Supply 100mL

Optional Accessory Oil Supply 100mL (181118-7)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan PRINTED IN JAPAN Z23340-2 2007-09