


| | |
|-----------------|---------------|
| Material number | 0 601 444 0F0 |
| EAN | 4059952554990 |
| Carrying case | ✓ |



Technical data

Technical data

| | |
|---|---|
| Rated input power | 500 W |
| Torque, max. (hard screwdriving applications) | 250 Nm |
| Torque, max. (soft screwdriving applications) | 160 Nm |
| Bit holder | 1/2" Square |
| Rated speed | 500 – 1,300 rpm |
| No-load speed | 800 – 1,900 rpm |
| Weight | 3,2 kg |
| Tool dimensions (length) | 315 mm |
| Tool dimensions (height) | 200 mm |
| Noise level | The A-rated noise level of the power tool is typically as follows: Sound pressure level 95 dB(A); Sound power level 108 dB(A). Uncertainty K= 3 dB. |
| Tool dimensions (width) | 315 mm |

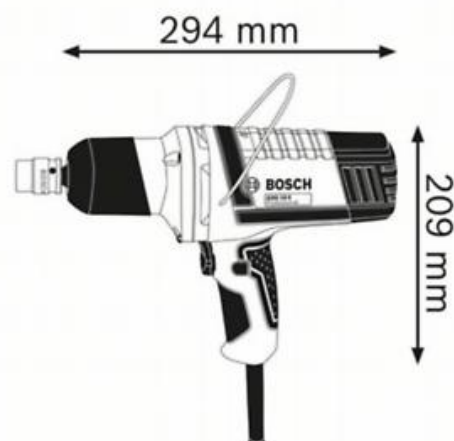

Screwdriving

| | |
|---------------------|------|
| Max. screw diameter | M 18 |
|---------------------|------|

Noise/vibration information

| | |
|----------------------|-----------|
| Sound pressure level | 95 dB(A) |
| Sound power level | 108 dB(A) |
| Uncertainty K | 3 dB |

Sales information

Positioning

- Perfect for drilling applications which require more power: Excellent performance when drilling concrete, wood and metal.

User benefit

- Perfect for fitting car wheels, erecting scaffolding and metal structures, and vehicle maintenance and technical support services
- Preselection switch: Perfect speed control
- New and improved protective guard offering greater resistance

