

0 601 9G4 2F0 – GDX 18V-200 C


Material number	0 601 9G4 2F0
EAN	3165140999571
2 x battery GBA 18V 4.0Ah 1 600 A00 163	✓
L-BOXX 136 1 600 A01 2G0	✓
Quick charger GAL 18V-40 Professional 1 600 A01 9RJ	✓



Technical data

Technical data

No-load speed	0 rpm
No-load speed (1st level)	0 rpm
No-load speed (2nd level)	0-2,300 rpm
No-load speed (3rd level)	0-3,400 rpm
Torque settings	3
Weight excl. battery	1.2 kg
Torque, max.	200 Nm
Impact rate	0-4,000 bpm
Impact rate (1st level)	0-2,300 bpm
Impact rate (2nd level)	0-3,400 bpm
Impact rate (3rd level)	0-4,000 bpm
Tool holder	1/2" Square 1/4" Hex Uni
Tool dimensions (width)	70 mm
Tool dimensions (length)	147 mm
Tool dimensions (height)	208 mm
Battery capacity	0,0 Ah
Battery voltage	18.0 V
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 95 dB(A); Sound power level 106 dB(A). Uncertainty K= 3 dB.

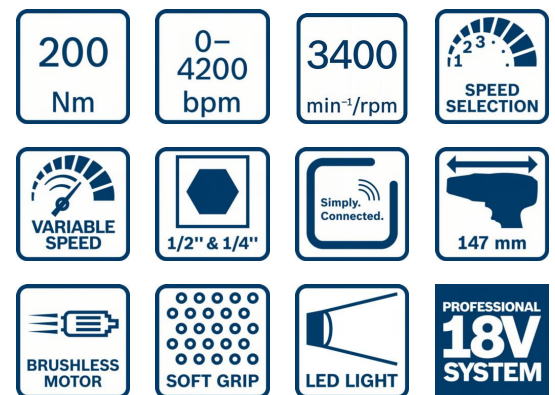

Screw diameter

Screw diameter	M 6 – M 16
----------------	------------

Sales information

Positioning

- High power in compact size

User benefit

- Ready for all applications, thanks to 2 in 1 bit holder: ¼” internal hex and ½” square drive
- Powerful use even in hard to reach areas thanks to best head length to torque ratio
- Bluetooth Connectivity module for tool feedback, soft start and service information via mobile device