

0 601 2A6 2F0 – GHG 20-63

Material number	0 601 2A6 2F0
EAN	3165140889353



Technical data

Technical data


Rated input power	2.000 W
Weight	0,7 kg
Tool dimensions (width)	86 mm
Tool dimensions (length)	245 mm
Tool dimensions (height)	201 mm
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 66 dB(A); Sound power level 77 dB(A). Uncertainty K= 3 dB.

Specifications, use

Working temperature	50 – 630 °C
Airflow	100 – 500 l/min
Continuously variable temperature control	✓
Cold stage, 50°C	✓
Control, airflow	3

Noise/vibration information

Sound pressure level	66 dB(A)
Sound power level	77 dB(A)
Uncertainty K	3 dB

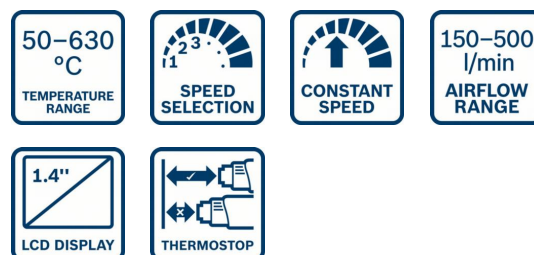

Sales information

Positioning

- The heat gun with the greatest ease of use

User benefit

- Heating automatically switches off and cools when overheating, for long service life
- Three working temperature settings
- Airflow and temperature control in steps of ten for precise working