

0 601 64E 2F0 – GSA 1300 PCE


Material number	0 601 64E 2F0
EAN	4059952545394
1 x reciprocating saw blade S 123 XF, Progressor for Metal available separately as set of 2: 2 608 654 416	✓
1 x reciprocating saw blade S 2345 X, Progressor for Wood available separately as set of 2: 2 608 654 403	✓
Carrying case	✓



Technical data

Technical data

Rated input power	1.300 W
Stroke rate at no load	0 – 2,900 spm
Weight	4,1 kg
Saw, stroke length	28 mm
Tool dimensions (width)	90 mm
Tool dimensions (length)	480 mm
Tool dimensions (height)	165 mm
Cutting depth in steel plate	20 mm
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 95 dB(A); Sound power level 106 dB(A). Uncertainty K= 3 dB.

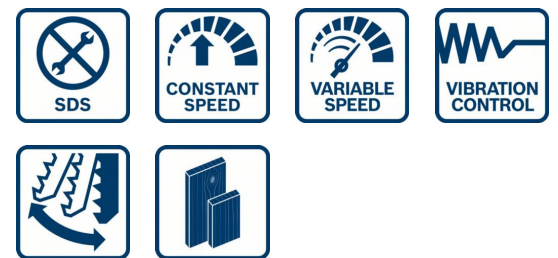

Cutting depth

Cutting depth in wood	220 mm
Cutting depth in metal profiles and metal pipes	175 mm

Noise/vibration information

Sound pressure level	95 dB(A)
Sound power level	106 dB(A)
Uncertainty K	3 dB

Sales information

Positioning

- Lowest vibration in its class – and a powerful 1300 watts

User benefit

- For low-fatigue working: anti-vibration handle and mass balance
- 1300-watt high-performance motor with Constant Electronic for the toughest applications
- Pendulum stroke for fast sawing progress