

0 601 9F6 0F0 – GSR 12V-15 FC


Material number	0 601 9F6 0F0
EAN	4053423226140
2 x battery GBA 12V 2.0Ah 1 600 A00 1BT	✓
Angle adapter GFA 12-W Professional 1 600 A01 16A	✓
Bit holder attachment GFA 12-X 1 600 A00 F5J	✓
Carrying case	✓
Drill chuck adapter GFA 12-B 1 600 A01 169	✓
Offset angle adapter GFA 12-E 1 600 A00 F5N	✓
Quick charger GAL 12V-40 Professional 1 600 A01 9R5	✓



Technical data

Technical data

Torque (soft/hard/max.)	15/30/- Nm
No-load speed (1st gear / 2nd gear)	0 – 400 / 0 – 1,300 rpm
Battery type	Lithium-ion
Chuck capacity, min./max.	1 / 10 mm
Battery voltage	12.0 V
Weight excl. battery	0.6 kg
Torque settings	20+1
Tool dimensions (width)	45 mm
Tool dimensions (length)	132 mm
Tool dimensions (height)	178 mm
Sound power level	79 dB(A)
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 79 dB(A); Sound power level 79 dB(A). Uncertainty K= 3 dB.

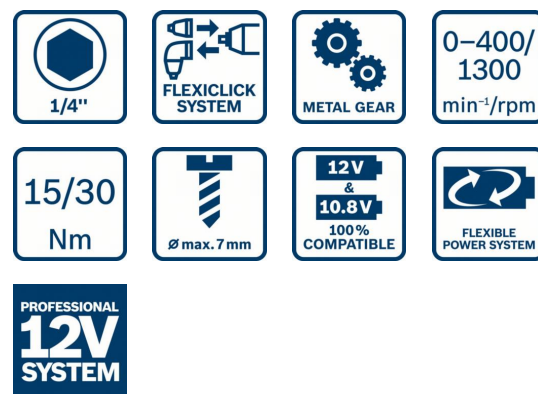

Drilling diameter

Max. drilling diameter in wood	19 mm
Max. drilling diameter in steel	10 mm

Screw diameter

Max. screw diameter	7 mm
---------------------	------

Noise/vibration information

Sound pressure level	79 dB(A)
Uncertainty K	3 dB

Sales information

Positioning

- Compact and flexible for any job in the 12 Volt class

User benefit

- Extremely short body design of 132 mm for drilling, fixing and screw driving in tight spaces
- Bosch FlexiClick interface with integrated magnetic bit holder enables attachment of a bit holder, a chuck adapter, an angle adapter and an offset angle adapter
- Angle and offset angle adapters can be adjusted and locked in 16 different positions with 360-degree mobility while on the drill
- “One-Click” interface ensures a tight fix to the machine at a glance