

# 0 601 4A2 0F0 – GTB 650

Material number	0 601 4A2 0F0
EAN	3165140920988
Carrying case	✓




## Technical data

### Description

Long version part 1 (BE)

The GTB 650 Professional corded screwdriver makes installing drywall convenient, efficient, and affordable when tackling projects in drywall, light steel, and sheet metal. With a motor RPM of 5,000, this effective screw gun can be attached to an MA55 for automatic screw feeding for high-speed drywall installation. Its reversible depth gauge enables unscrewing without removing the depth gauge for added convenience and safety. Use this tool with drywall screws up to Ø4mm in one layer of drywall with light steel frames and self-drilling screws up to Ø6mm in 1.5 mm sheet metal.

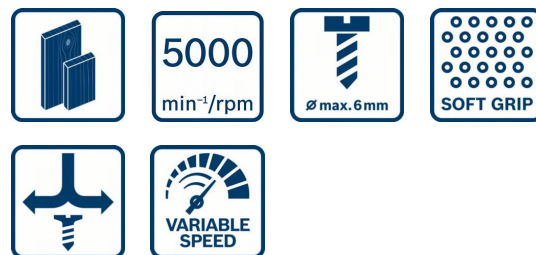

Noise level

The A-rated noise level of the power tool is typically as follows: Sound pressure level 84 dB(A); Sound power level 95 dB(A). Uncertainty K= 3 dB.

### Technical data

Rated input power	650 W
Torque, max. (soft screwdriving applications)	12 Nm
Bit holder	1/4" Hex Uni
No-load speed	0 – 5,000 rpm
Weight	1,4 kg
Tool dimensions (width)	68 mm
Tool dimensions (length)	283 mm
Tool dimensions (height)	190 mm

### Screwdriving

Self-drilling screw diameter	6,0 mm
Max. screw diameter	4,0 mm

### Noise/vibration information

Sound pressure level	84 dB(A)
Sound power level	95 dB(A)
Uncertainty K	3 dB

## Sales information

---

### Positioning

- Efficient, Convenient and Affordable Drywall Powerhouse within Reach

### User benefit

- A high motor RPM of 5,000 for faster screwing and hence quicker job completion
- Use with drywall screws up to Ø4mm in two layers of drywall and self-drilling screws up to Ø6mm in 1.5 mm sheet metal
- Reversible Depth Gauge allows unscrewing without removing the gauge for convenience and safety
- Attach with the Bosch screw auto feeder for an increase of productivity by at least 50%