

0 611 332 1F0 – GBH 4-32 DFR

Material number	0 611 332 1F0
EAN	3165140717595
Auxiliary handle 2 602 025 176	✓
Carrying case 2 605 438 651	✓
Depth stop 310 mm 1 613 001 003	✓
SDS plus quick-change chuck 2 608 572 213	✓



Technical data

Description

Long version part 1 (BE)

The GBH 4-32 DFR Professional is the most powerful tool within Bosch's SDS plus corded rotary hammer category. Its 900 W motor delivers an outstanding 4.2 J of impact energy for the fastest chisel removal rates in Bosch's SDS plus range. The rotary hammer is designed for durability, featuring a robust metal gearbox housing. Its Vibration Control enables effortless and continuous work in time intensive applications.

Long version part 2 (BE)

This tool is intended for drilling and chiselling in concrete, masonry, wood, and metal. It is compatible with various dust attachments.

Tool dimensions (width)

73 mm

Tool dimensions (length)

400 mm

Tool dimensions (height)


226 mm

Drilling diameter in concrete with core cutters

25 mm

Noise level

The A-rated noise level of the power tool is typically as follows: Sound pressure level 93 dB(A); Sound power level 104 dB(A). Uncertainty K= 2 dB.

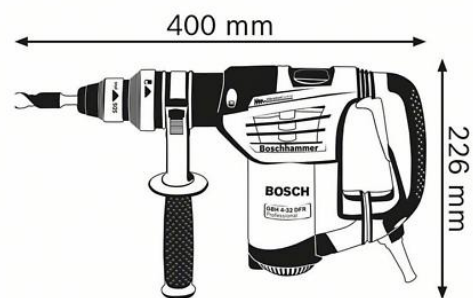

Technical data

Rated input power

900 W

Impact energy (according to EPTA 05/2016)

4.2 J

Impact rate at rated speed

0 – 3,600 bpm

Rated speed

0 – 800 rpm

Weight

4,7 kg

Tool holder

SDS plus

Drilling range

Hammer drilling diameter range in concrete

6 – 32 mm

Recommended drilling diameter range in concrete

14 – 25 mm

Max. drilling diameter masonry, core cutters

90 mm

Max. drilling diameter in metal

13 mm

Max. drilling diameter in wood

32 mm

Sales information

Positioning

- The fastest multi-hammer in the 4kg class

User benefit

- Wide range of applications in chiselling and drilling work and when working with a core cutter
- Drills up to 30% faster (25 mm diameter) than other tools in its class
- Low vibration levels of only 12 m/s² for less tiring work due to Bosch Vibration Control